



SL2040~SL20100

20.0Amp Surface Mounted Schottky Barrier Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Built-in strain relief, ideal for automated placement
- Low forward voltage drop
- High forward surge current capability
- High temperature soldering guaranteed
250°C/10 seconds at terminals

TO-277B



Mechanical Data


Case : Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.003 ounce, 0.092 grams

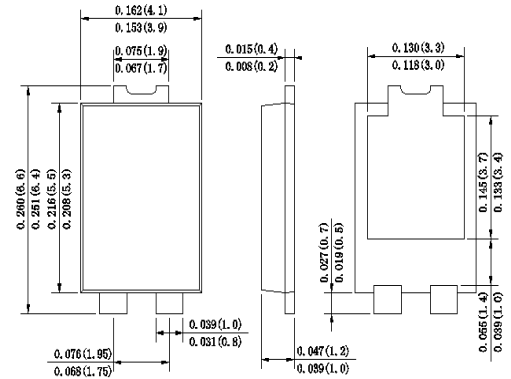

LEFT PIN 0
RIGHT PIN 0
BOTTOMSIDE
HEAT SINK

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SL2040	SL2045	SL2050	SL2060	SL2080	SL20100	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	40	45	50	60	80	100	V
Maximum RMS voltage	V _{RMS}	28	31.5	35	42	56	70	V
Maximum DC blocking voltage	V _{DC}	40	45	50	60	80	100	V
Maximum average forward rectified current at T _L =100°C	I _(AV)	20.0						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	250.0						A
Maximum instantaneous forward voltage at 2.0A at 20.0A	V _F	0.35 0.48			0.40 0.55	0.45 0.70		V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	0.5 50				0.2 20		mA
Typical thermal resistance	R _{qJA}	60.0						°C/W
Operating junction temperature range	T _J	-55 to +150						°C
Storage temperature range	T _{STG}	-55 to +150						°C

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

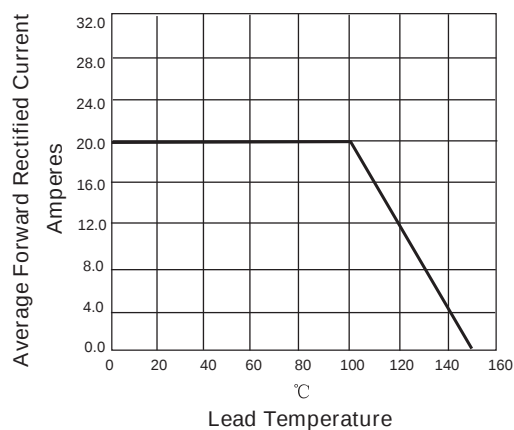


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

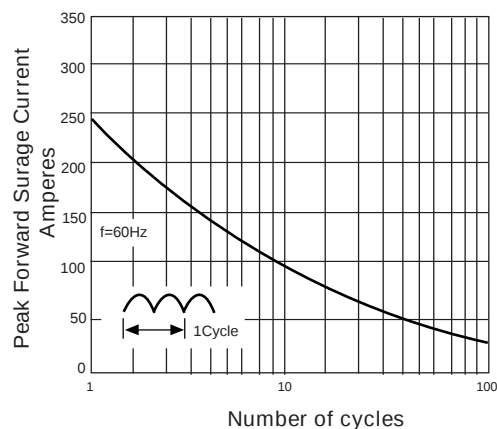


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



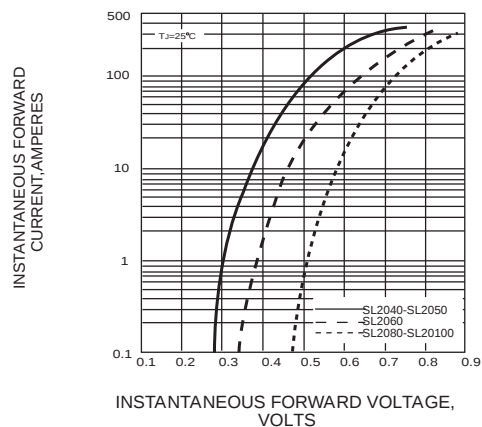


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

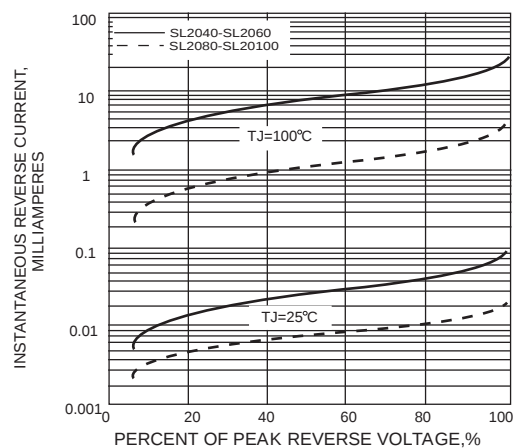


Suggested Pad Layout

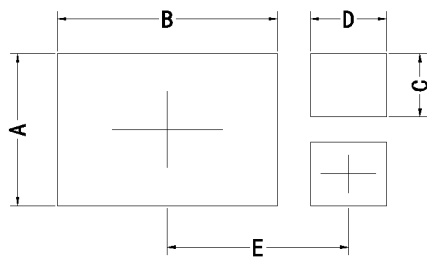

Symbol	Unit (mm)	Unit (inch)
A	3.60	0.142
B	5.35	0.211
C	1.50	0.059
D	1.85	0.073
E	4.30	0.169

Suggested Soldering Temperature Profile

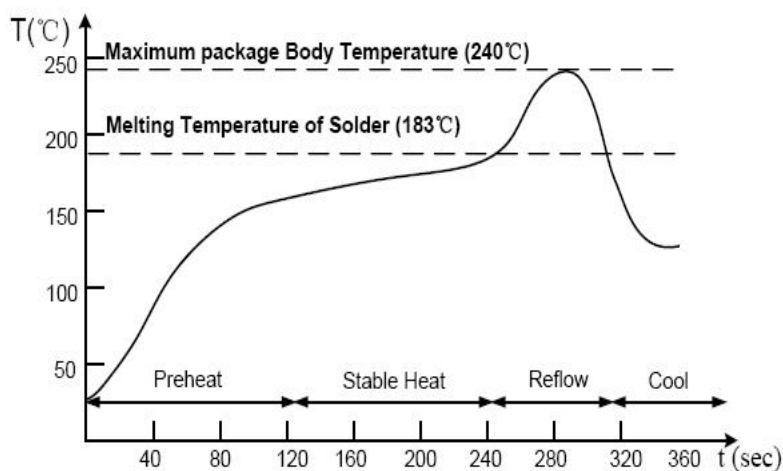


Note

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 265°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Carrier Dimension(mm)

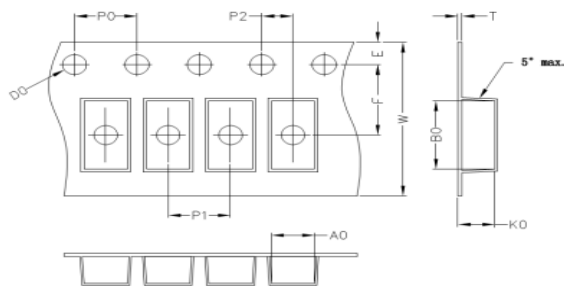

A0	B0	K0	D0	E	F
4.40	6.90	1.30	1.55	1.75	7.50
P0	P1	P2	T	W	Tolerance
4.0	8.0	2.0	0.25	12	0.1

Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
TO-277B	13'	330	5.0	340	10.0	360*360*360	80